

The tool is for revising the printer “code page” and updating program


Precondition: printer driver has already been installed on computer.

● **Revising printer ”code page”:**

1. Open the tool which is in the CD

(\\SGT-802 driver and tool\PrjSGT-802(Codepage&Program).exe)

2. Operating PrjSGT-802(Codepage&Program).exe, as below picture

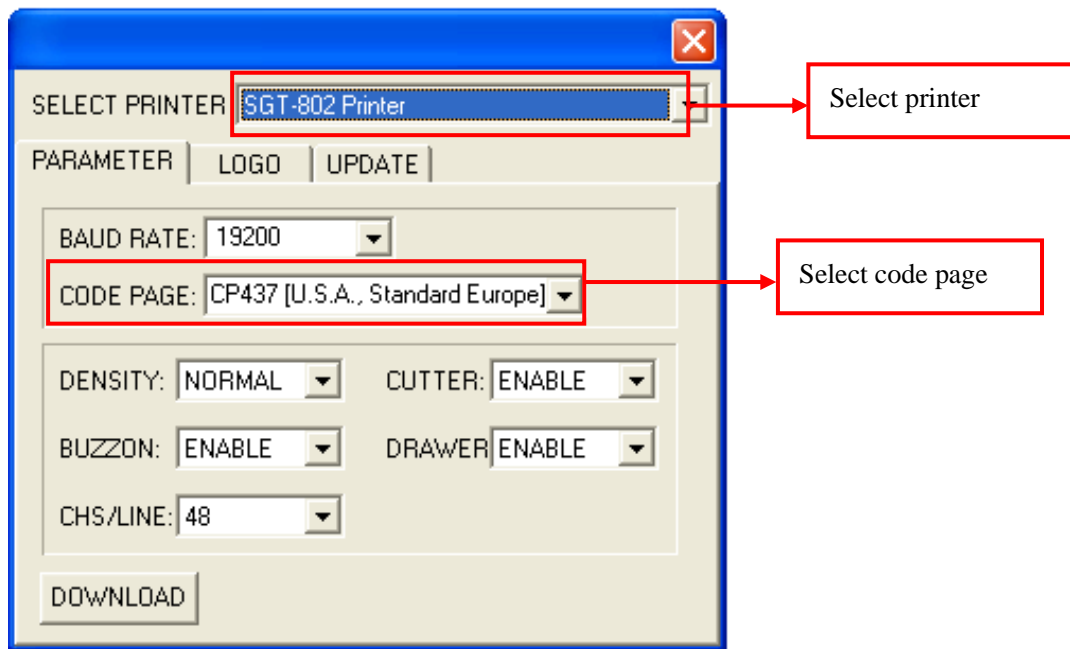

Picture 1


3. “Star → Printer and Fax → SGT-802 Printer property → port” Select port from, “usb, TCP/IP, com, LPT” ,according to the port which user connected with the printer.

4. On picture1, select printer, such as “SGT-802 Printer” → “CODE PAGE”, select one from the dropdown list

5. Click “DOWNLOAD” , and you can check if it is revised successfully by printer self-test page.

● **Updating Program:**

1. Operating PrjSGT-802(Codepage&Program).exe, as below picture

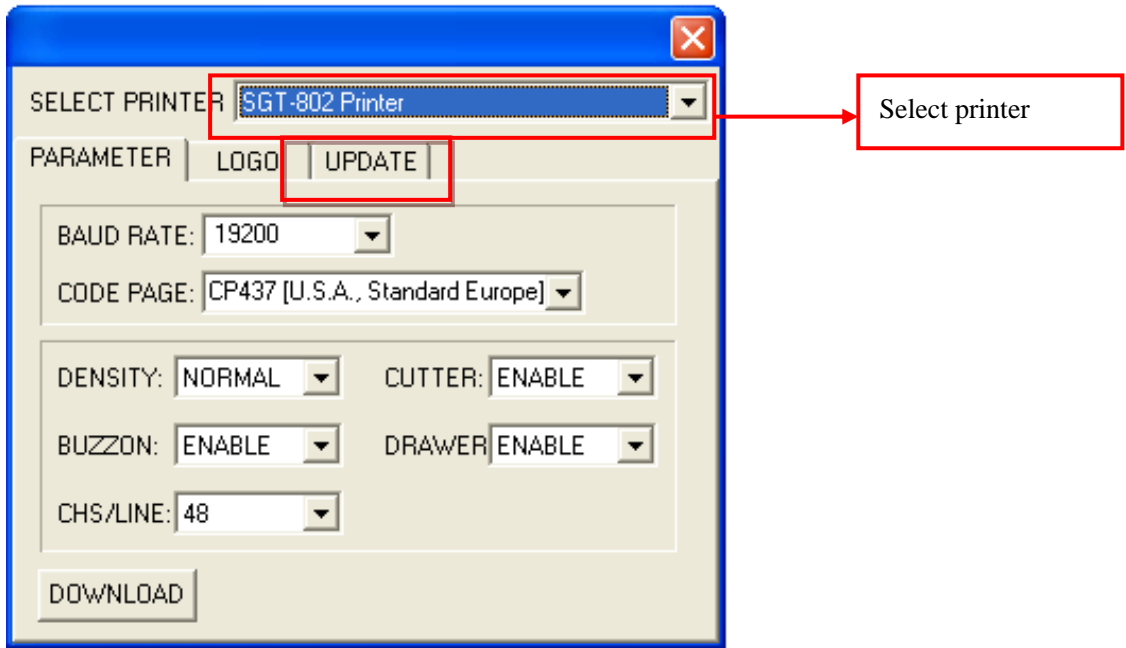


Picture 2

2. “Start →Printer and Fax → SGT-802 Printer Property → Port” Select one port from “usb, TCP/IP, com, LPT” , according to the port which user connected with the printer.


3. Select Printer on Picture 2, which is marked with red box

4. Click “UPDATE” on Picture 2, and you can see as below picture 3:

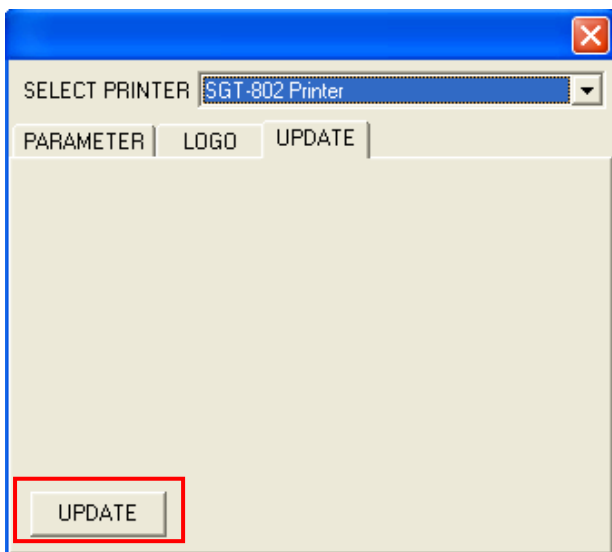


Picture 3

5. Click "UPDATE" on picture 3, and will show as followed picture 4

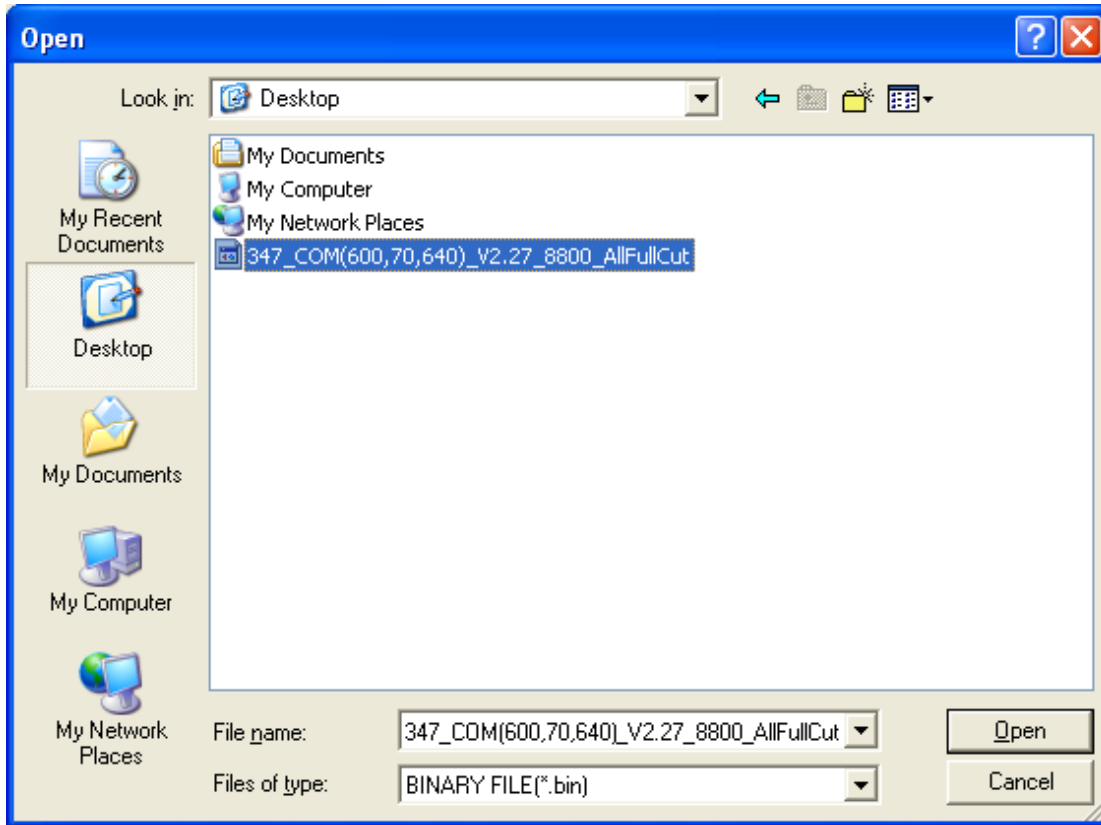

Picture 4

6. Select the location which the updated program would be put to, and you then you would see as the following picture.

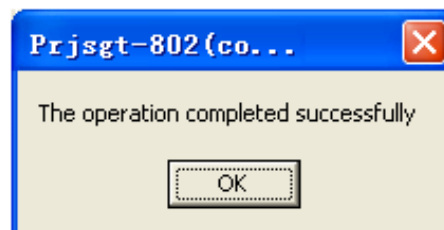

7. Click "OK" on the above picture, and then the program will start to update, after finishing updating, the printer will end with a short "di" sound.